
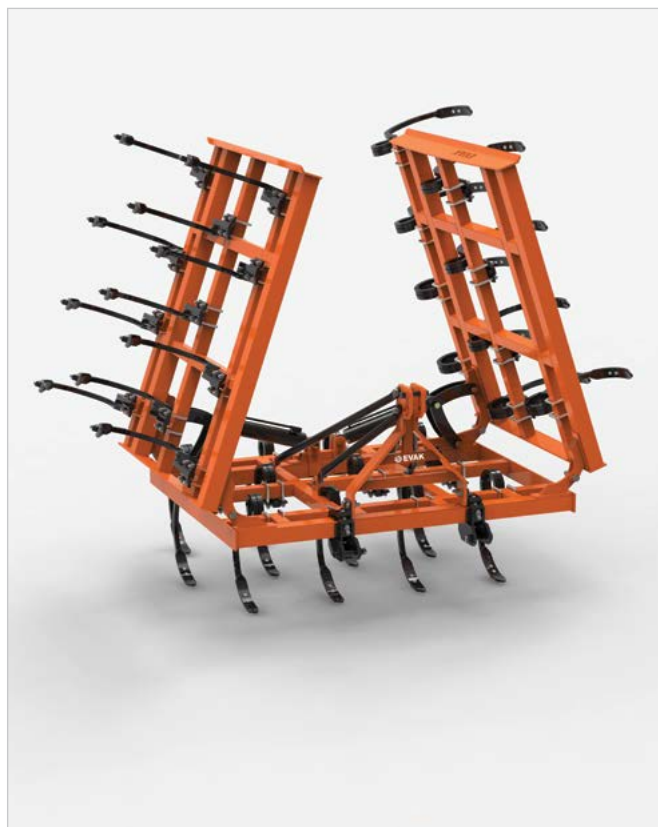


BT

Καλλιεργητής / Cultivator

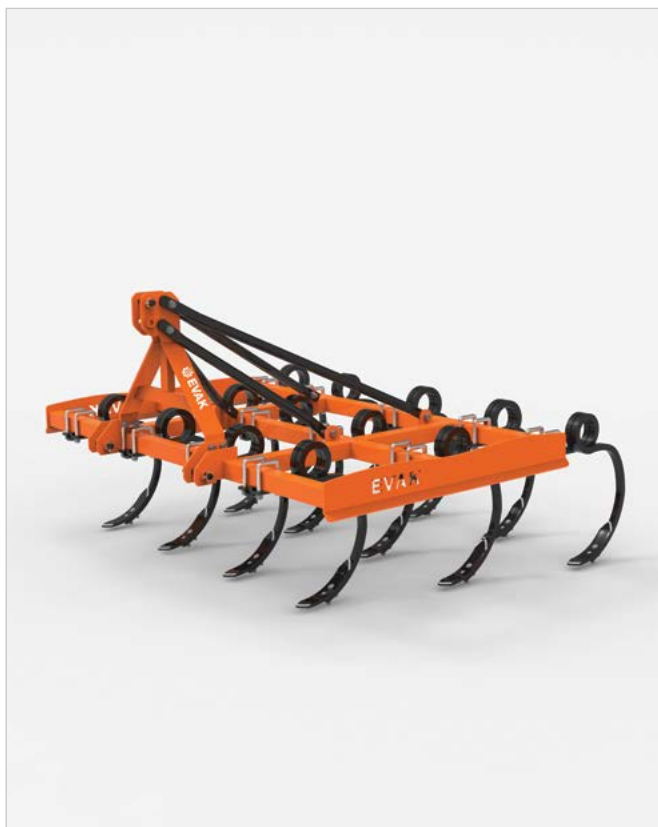

Περιγραφή

Ο καλλιεργητής βαρέος τύπου BT χρησιμοποιείται για το άνοιγμα και τον αερισμό οργωμένου χωραφιού πριν την προετοιμασία του εδάφους για την ανοιξιάτικη σπορά.

Χαρακτηριστικά

- Ενισχυμένος κοιλοδοκός 80x80x6.
- Ανθεκτικός πύργος τριών σημείων με κόντρες από διάτρητο Φ48x4mm.
- Ελατήρια 25x25mm ή 30x30mm της εταιρίας BIANCHI.
- Ύψος ελατηρίου 535mm.
- Νύχι διπλής κοπής σφυρήλατο για μεγάλη αντοχή στη φθορά.
- Μοντέλα από 2,00-8,00m.

Description

The heavy type cultivator is used for opening and airing ploughed soil before the seedbed preparation of spring seeding.

Key Features

- Strong frame made of square hollow section 80 80 6.
- Durable three-point hitch supported by Φ48x4 seamless tubes.
- Double coil tines by Bianchi 25 25mm or 30 30mm.
- Tine height 535mm.
- Forged double face points for maximum wear resistance.
- Models available from 2,00 to 8,00m.



1.



2.

1. ΒΤ σε ώρα εργασίας / BT at work 2. Ελατήρια της εταιρίας BIANCHI / Double coil tines by Bianchi

Τεχνικά Χαρακτηριστικά / Specifications

| Μοντέλο Model | Πλάτος εργασίας (m) Working width (m) | Ελατήρια Tines | Πάχος ελατηρίου (mm) Tine thickness(mm) | Βάρος(kg) Weight(kg) | Ιπποδύναμη(hp) Horsepower(hp) |
|---|--|-------------------|--|-------------------------|----------------------------------|
| Σταθερό Πλαίσιο / Fixed Frame | | | | | |
| BT 230/13 | 2,30 | 13 | 25x25 / 30x30 | 470 | 80 - 90 |
| BT 290/16 | 2,90 | 16 | 25x25 / 30x30 | 580 | 90 - 120 |
| BT 330/19 | 3,30 | 19 | 25x25 / 30x30 | 645 | 120 - 140 |
| BT 360/22 | 3,60 | 22 | 25x25 / 30x30 | 755 | 140 - 160 |
| BT 400/25 | 4,00 | 25 | 25x25 / 30x30 | 930 | 180 - 200 |
| Αναδιπλούμενο Πλαίσιο / Folded Frame | | | | | |
| BT 500/28 | 5,00 | 28 | 25x25 / 30x30 | 1185 | 200 - 220 |
| BT 600/34 | 6,00 | 34 | 25x25 / 30x30 | 1550 | 220 - 240 |
| BT 700/40 | 7,00 | 40 | 25x25 / 30x30 | 1780 | > 240 |